

# Using a VIA-Less CRLH Transmission Line to Design Compact Wilkinson Power Dividers and Rat-Race Couplers

H. Rahmanian\*, S. H. Sedighy\*\*<sup>(C.A.)</sup> and M. Khalaj Amirhosseini\*

**Abstract:** A method for design and implementation of a compact via-less Composite Right/Left-Handed Transmission Line (CRLH TL) is presented. By introducing a new circuit model, the CRLH transmission line behavior is studied versus the parameters variations to achieve the desired characteristic impedance and electrical length. Then a compact quarter wavelength CRLH transmission line with  $70 \Omega$  characteristic impedance is designed as an example. Finally a very compact four way Wilkinson power divider and a rat-race coupler are designed and fabricated by using this type of CRLH TL which exhibit about 75% and 80% compactness, respectively.

**Keywords:** CRLH Transmission Line, Wilkinson Power Divider, Rat Race Coupler.

## 1 Introduction

From the introducing of the backward wave propagation supporting materials which have opposite sign in the phase and group velocities, the different realizations approach of these materials has been reported such as wire medium [1-3], multilayer structure [4], and photonic crystal [5]. The left handed (LH) structure is another ways for implementing of these artificial media [6-16]. The LH transmission line consists of transmission line unit cells loaded by series capacitance and shunt inductance which lead to new microwave applications based on its unique backward wave characteristics [17-18]. Due to the intrinsic parasitic series inductance and shunt capacitance in the transmission line structure, it is impossible to have a pure LH transmission line. By modeling these parasitic elements, one can achieve a complete transmission line model called Composite Right/Left-Handed Transmission Line (CRLH TL) which has been introduced in [19]. The CRLH TL behaves as a LH at low frequencies, while at high frequencies it acts as a conventional transmission line. Direct implementation of the CRLH TL structure imposes using a short circuit stub which is grounded by a via connection. But, the via connection fabrication process is not as easy as a planar fabrication. Furthermore, it causes some undesirable effects on the designed prototype such as radiation [20]

and the frequency shift [21] especially at higher frequencies. To overcome these issues, the coplanar waveguide configuration has been used in [22]. Since the ground conductors and signal line are in the same plane in this type of CRLH TL, the shunt inductances can be accommodate without having vias.

In our previous work [28], a new via free microstrip CRLH TL is considered to achieve a low cost and easy fabrication microwave devices. This new CRLH TL which is based on the unit cell introduced in [23], can be modeled by a new circuit model that is more matched with the structure behavior. Moreover, compare with [23], in this paper the effects of the CRLH TL parameters in the electrical length and characteristic impedance of the unit cell are analyzed and simulated to extend the application of the introduced CRLH TL in microwave devices. This work can be an extension over previous works such as [29-30] that tries to compact the TLs in microwave devices. The results show that this CRLH transmission line can achieve a wide range of electrical length and characteristic impedance with shorter physical length compared with the traditional transmission lines. Therefore, this CRLH TL can be used for miniaturization of the microwave devices. After it, the proposed CRLH TL is optimized to design a quarter wavelength transmission line with  $70 \Omega$  characteristic impedance as an example. Finally, the CRLH TL is used instead of the ordinary transmission line in a four way Wilkinson power divider and a rat-race coupler to verify the concept. The simulation and measurement results of these devices show about 75% and 80% compactness compared with the traditional ones which verify the high capability of the method in compacting the microwave devices.

Iranian Journal of Electrical & Electronic Engineering, 2015.

Paper first received 17 Oct. 2014 and in revised form 14 Jan. 2015.


\* The Authors are with the School of Electrical and Electronic Engineering, Iran University of Science and Technology, Tehran, Iran.

\*\* The Author is with the School of New Technologies, Iran University of Science and Technology, Tehran, Iran.

E-mails: hos.rahmanian@gmail.com, sedighy@iust.ac.ir and khalaja@iust.ac.ir.

## 2 CRLH Transmission Line Modeling

A common CRLH TL unit cell is composed of a series capacitance, shunt inductance, series inductance and shunt capacitance [6]. The CRLH unit cell configuration and its schematic are shown in Fig. 1. This model describes the structure behavior much better than the circuit model presented in [23]. The main difference is the capacitance due to the gap between the meander line segments that causes a series resonance in vertical branch which is modeled in Fig. 1. The model is composed of series capacitor (CHS) which is a metal-insulator-metal (MIM) capacitor, a vertical capacitor (CVS) achieved by the effect of the gap between two MIM capacitors, the parallel combination of vertical inductor (LVP) and vertical capacitance (CVP) resulted from the meander inductor located at the PCB ground, and the series inductor (LHS) belongs to the defected ground structure (DGS) effective inductance. In order to change the circuit elements, some parameters are defined to change the element values. The  $S_{cap}$  and  $w_{cap}$  are defined to tune the gap and MIM capacitors. Also, as shown in Fig. 1(a), the length, width and the space between the meander line segments are defined by  $l_{cap}$ ,  $w_{mndr}$  and  $S_{mndr}$ , respectively which change the CVP and LVP. Moreover, the LHS affects the LHS value.

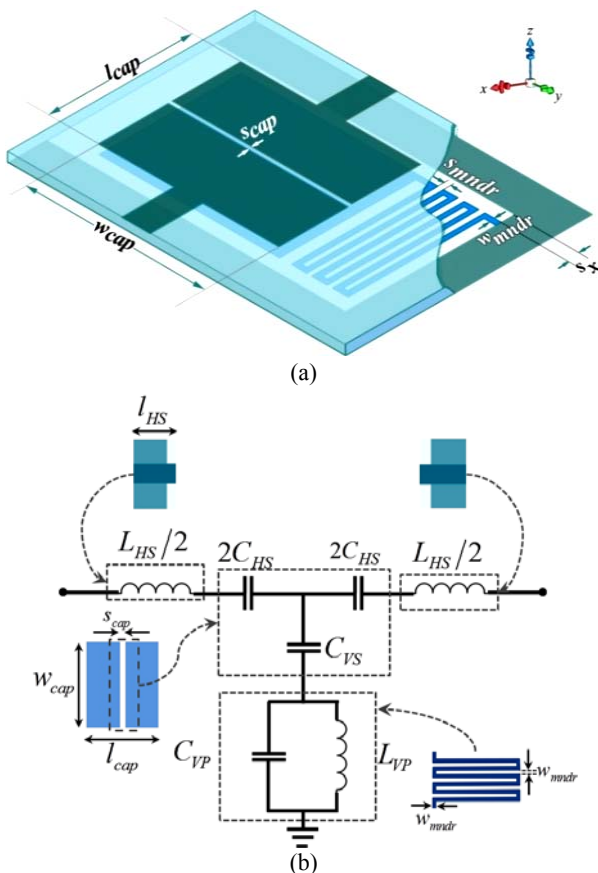

**Fig. 1** Proposed composite right/left-handed transmission line, a) 3D structure b) circuit model.

Notice that the defected ground structures (DGS) are usually modeled with a parallel conductance, capacitance and inductance [24], but here we are far from the DGS resonance frequency and therefore we can ignore the effect of conductance and capacitance of the DGS inductance. This effective inductance can be tuned by changing the top microstrip transmission line width and the etched part width in the ground defined by  $S_x$ . Also, due to the specific required width of the microstrip transmission line to achieve  $50 \Omega$  input impedance, the effective inductance of DGS can be controlled by  $S_x$ .

The characteristic impedance ( $Z_C$ ) for this CRLH TL structure can be calculated by using familiar procedure mentioned in [25], which is

$$Z_C = \sqrt{\frac{Z}{Y}} = Z_L \sqrt{\frac{((\omega/\omega_H)^2 - 1)((\omega/\omega_{V1})^2 - 1)}{(\omega/\omega_{V2})^2 ((\omega/\omega_{ind})^2 - 1)}} \quad (1)$$

where  $\omega_H = \sqrt{1/C_{HS}L_{HS}}$ ,  $\omega_{V1} = \sqrt{1/((C_{VP} + C_{VS})L_{VP})}$ ,  $\omega_{V2} = \sqrt{1/(C_{VS}L_{VP})}$ , and  $\omega_{ind} = \sqrt{1/(C_{VP}L_{VP})}$  are the horizontal branch, first and second vertical branch, and meander inductor resonance frequencies, respectively. Moreover,  $Z_L = \sqrt{L_{VP}/C_{HS}}$  is the left handed impedance of the CRLH TL unit cell. These relations show that the CRLH characteristic impedance is generally depended on the frequency. To design this CRLH TL, a parameter called scale is assigned in the model to scale all the unit cell physical parameters such as  $l_{cap}$ ,  $w_{cap}$ ,  $S_x$ ,  $w_{mndr}$  and  $S_{mndr}$ , identically and changing the operation frequency, consequently. The simulation results show that the CRLH TL characteristic impedance can be decreased by increasing  $w_{mndr}$  and  $S_{mndr}$ , while the electrical length is increased, accordingly. Also, the total inductance of meander inductor is increased when the distance between meander line turns and width are increased [26] which causes increasing the coupling between meanders ( $C_{VP}$ ), also. Increasing of  $L_{VP}$  results in decreasing the second resonance frequency of the vertical branch ( $\omega_{V2}$ ) and decrease  $Z_C$ , consequently as it shown in Eq. (1). On the other hand, since the capacitance of a parallel plate capacitor,  $C_{HS}$ , is growth by increasing of the plates area, enhancement of  $w_{cap}$  and  $l_{cap}$  increase the characteristic impedance and decrease the electrical length and the horizontal branch resonance frequency ( $\omega_H$ ). To extract the equivalent characteristic impedance and electrical length of the designed CRLH TL from the S-parameters of the simulation results, the below relation can be used [27].

$$Z_c = Z_0 \sqrt{\frac{(1 + S_{11})^2 - S_{21}^2}{(1 - S_{11})^2 - S_{21}^2}} \quad (2)$$

where  $Z_C$  and  $Z_0$  are the CRLH TL and reference characteristic impedance, respectively. Also, the electrical length is equal to the argument of  $S_{12}$ . The

commercial full wave simulator software (Ansoft HFSS) has been used to simulate the CRLH TL unit cell. Figure 2 shows the effect of  $w_{mndr}$  and  $w_{cap}$ , separately. The effect of  $l_{cap}$  in electrical length is similar with  $w_{cap}$  except  $l_{cap}$  has a more effect on characteristic impedance. In addition, the place of the two  $50 \Omega$  lines in the both sides of CRLH TL has negligible effect on both characteristic impedance and electrical length.


Now we are ready to design a CRLH TL to achieve a  $70.7 \Omega$  characteristic impedance and 90 degrees electrical length as an example which can be used to design some well known microwave devices such as Wilkinson power divider and rat-race coupler. Based on the effect of each parameter which was discussed and studied in the design producer, the CRLH TL can be tuned to achieve the desirable specifications. The designed CRLH TL has the real characteristic impedance of  $72.2 \Omega$ , small imaginary part of  $0.2 \Omega$  and an electrical length of 90 degrees at the design frequency, 460 MHz. The TLX-8 with a dielectric constant of 2.55, a tangent loss of 0.0019 and a thickness of 0.8 mm has been selected as the substrate of the CRLH TL. The values of the circuit and physical parameters are tabulated in Table 1.

**Table 1** Circuit and physical parameters value.


Circuit Elements	Physical Parameters	Value	Description
$L_{VP} = 6.97 \text{ nH}$ $C_{VP} = 0.21 \text{ pF}$	$w_{mndr}$	0.45 mm	meander inductor
	$S_{mndr}$	0.4 mm	
$L_{HS} = 7.62 \text{ nH}$	$S_x$	1 mm	DGS inductance
$C_{HS} = 2.75 \text{ pF}$	$w_{cap}$	16.5 mm	series capacitance
	$l_{cap}$	12 mm	
$C_{VS} = 0.2 \text{ pF}$	$S_{cap}$	0.2 mm	gap effect

### 3 Wilkinson Implementation

Based on the designed CRLH TL in the previous section, a miniaturized four way Wilkinson power divider is designed and fabricated on the TLX-8 substrate at 460 MHz which is shown in Fig. 3. The designed four ways Wilkinson power divider is composed of three identical two ways Wilkinson power dividers. The  $70.7 \Omega$  ordinary quarter wavelength microstrip lines in the conventional Wilkinson power divider are replaced by designed CRLH TL in the previous section which has  $72.2 \Omega$  characteristic impedance and 90 degree electrical length.

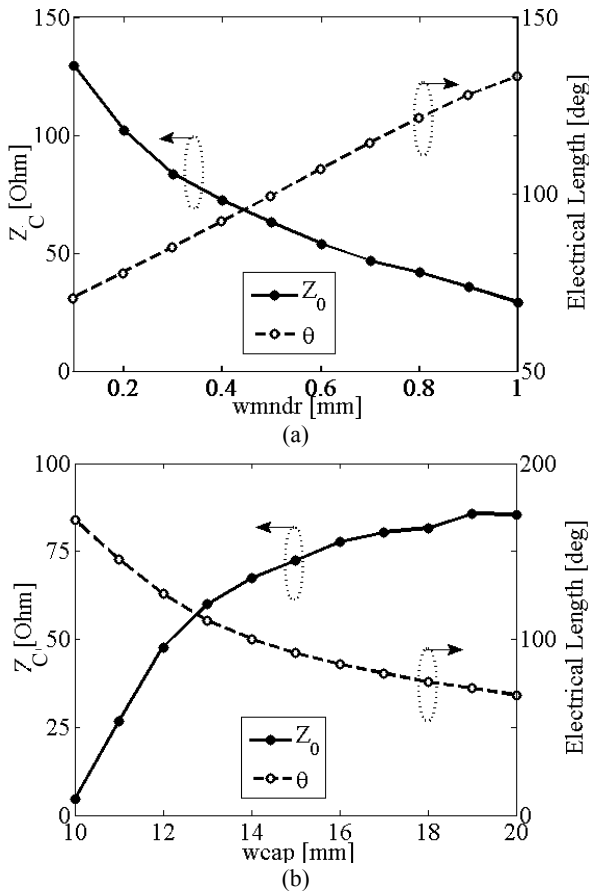


**Fig. 2** Characteristic impedance and electrical length variations as a function of  $w_{mndr}$  and  $w_{cap}$ .

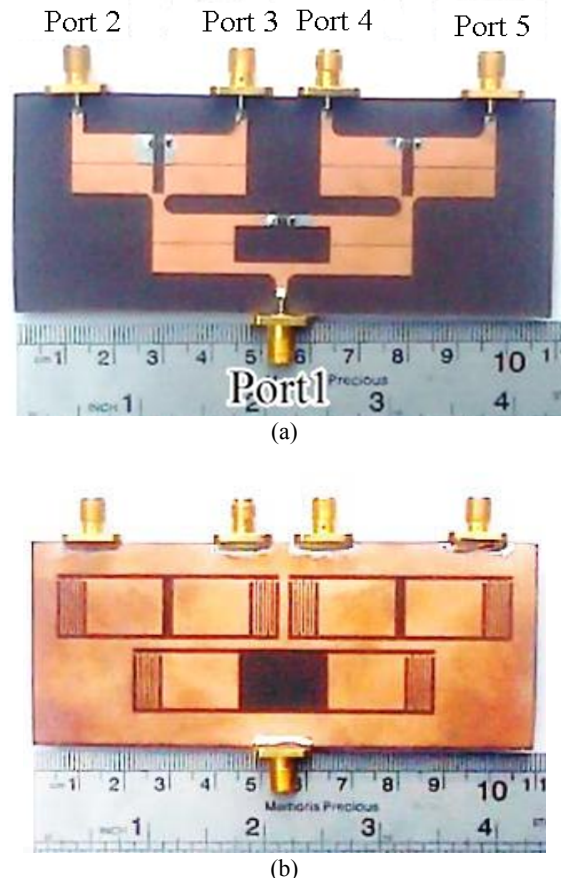

**Fig. 3** Fabricated 1 to 4 Wilkinson power divider, (a) Top view (b) Bottom view.

Although the designed CRLH in the previous section was simulated completely, but to consider the coupling effect of the CRLH TL segments in the four way Wilkinson dividers, the full wave simulation of the power divider is done. Figure 4 shows the comparison of the full wave simulation and measurement results of the designed CRLH TL Wilkinson power divider. The electrical performance of the power divider is measured by using Agilent E5071C network analyzer. The simulated and measured return losses, insertion losses and isolations are shown in this figure. The plots represent a good agreement between simulation and measurement results. The power divider has a return loss better than 30 dB and an insertion loss less than 6.4 dB for all ports. Also, the isolation is more than 15 dB for adjacent ports (2-3 and 4-5) and more than 25 dB for non-adjacent ports (2-4 and 3-5). Moreover, the designed CRLH Wilkinson power divider has about 75% area reduction compared with the traditional one at the design frequency.

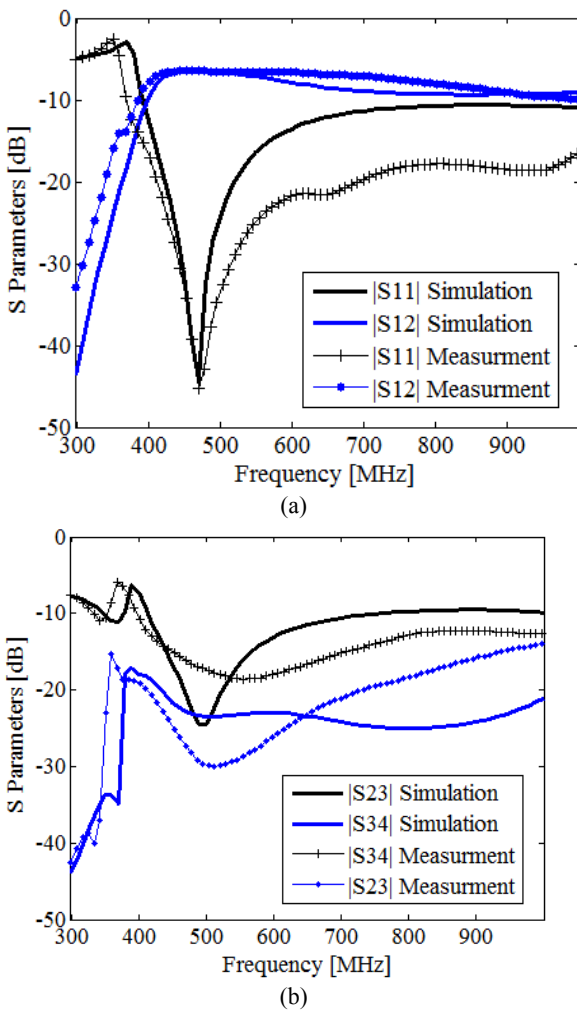


**Fig. 4** The S parameters comparison of the simulation and measurement results four ways Wilkinson power divider, (a)  $|S_{11}|$  &  $|S_{12}|$  and (b)  $|S_{23}|$  &  $|S_{34}|$ .


#### 4 Rat Race Implementation

In this section, the designed CRLH TL is used to miniaturize another microwave component, rat-race coupler. The conventional rat-race coupler consists of three identical uniform transmission lines with a characteristic impedance of  $70.7 \Omega$  and 90 degree electrical length and another transmission line with the same characteristic impedance but 270 degree electrical length. Therefore, this device can be considered as a six quarter wavelength uniform transmission lines which occupy huge circuit area. For miniaturizing of this component, the uniform conventional transmission lines are replaced by the designed CRLH TL in Sec. 2.

The designed CRLH TL rat-race coupler is shown in Fig. 5 which is fabricated on the TLX-8. It can be seen that the useless interior space of the designed rat race is filled by the CRLH TLs. Same as the design approach for the Wilkinson divider in the previous section, the rat-race coupler composed of CRLH TL segments is simulated by HFSS, completely. The simulation and measurement results of the coupler are compared in Fig. 6. There is a small frequency shift and a reduction in bandwidth which may be caused by commercial fabrication processes.

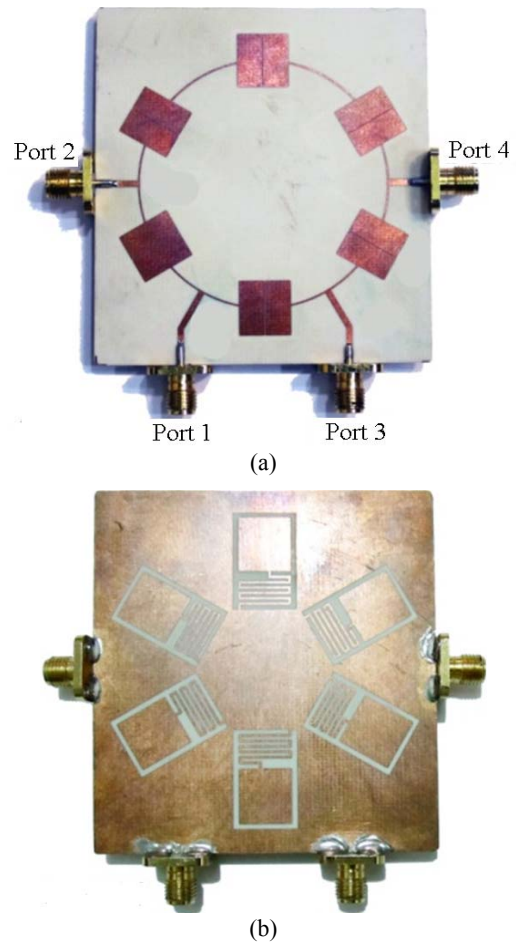

**Fig. 5** Fabricated Rat Race divider, (a) Top view (b) Bottom view.

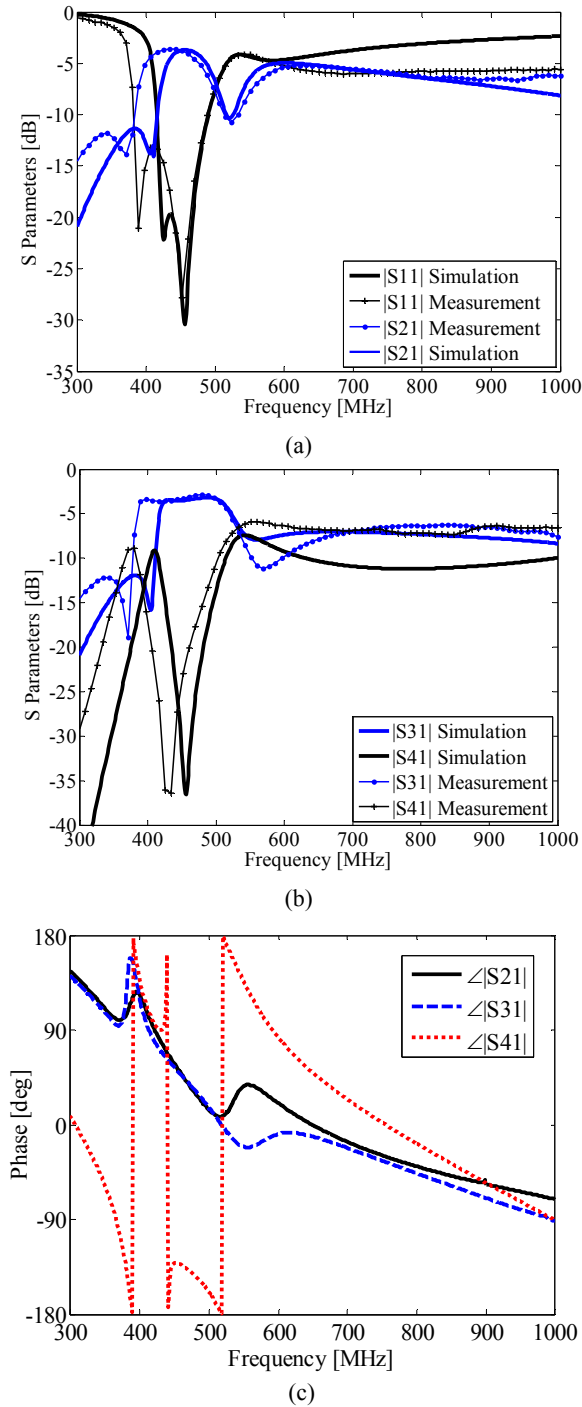

**Fig. 6** The S parameters comparison of the simulation and measurement results of Rat Race, (a)  $|S_{11}|$  and  $|S_{21}|$  (b)  $|S_{31}|$  and  $|S_{41}|$  and (c) simulated phase of  $S_{21}$ ,  $S_{31}$  and  $S_{41}$ .

The designed device has a return loss less than 30 dB, an insertion loss less than 3.2 dB. Also, the isolation between port 1 and 4 is better than 35dB. The Comparison between the conventional and designed rat-race shows that using the designed CRLH TL unit cells instead of the conventional uniform transmission lines, an area size reduction more than 80% can be achieved at the design frequency, 460 MHz.

**Table 2** Comparison between proposed structures and references.

References	Compactness	Limitation
Introduced in [11]	50%	-
Introduced in [12]	91%	Using Lumped Elements
Introduced in [13]	85%	Hybrid of Slow Wave and CRLH TL
Introduced in [14]	77%	Using Lumped Element
Introduced in [15]	93%	Using Multilayer structure
<b>This paper</b>	80%	-

In Table 2, our proposed structures are compared to some other metamaterials Wilkinson and rat-race power dividers obtainable in the literature. It can be seen that the proposed structures have a very compact dimensions without any practical limitation.

## 10 Conclusion

An improved method to design a via-less CRLH TL was developed and a new circuit model of this TL has been presented. Moreover, the effects of the CRLH TL design parameters were discussed. Then, a CRLH TL with a real characteristic impedance of 72.2  $\Omega$  and electrical length of 90 degrees was designed as an example which was used in the implementation of a high compact four way Wilkinson power divider and rat-race coupler. The designed power divider and rat-race coupler by CRLH TL unit cells exhibit about 75% and 80% compactness compared with the conventional ones besides having no practical limitation. This verifies the capability of the proposed CRLH unit cell.

## References

- [1] I. S. Nefedov and A. J. Viitanen, "Guided waves in uniaxial wire medium slab", *Progress In Electromagnetics Research*, PIER 51, pp. 167–185, 2005.
- [2] M. Hudlicka, J. Macha and I. S. Nefedov, "A triple wire medium as an isotropic negative permittivity metamaterial", *Progress In Electromagnetics Research*, PIER 65, pp. 233–246, 2006.
- [3] S. Sesnic, D. Poljak and S. Tkachenko, "Time domain analytical modeling of a straight thin wire buried in a lossy medium", *Progress In Electromagnetics Research*, Vol. 121, pp. 485–504, 2011.
- [4] H. Rahimi, A. Namdar, S. Roshan Entezar and H. Tajalli, "Photonic transmission spectra in one-dimensional fibonacci multilayer structures containing single-negative metamaterials",

*Progress In Electromagnetics Research*, PIER 102, pp. 15-30, 2010.

- [5] W.-Z. Yan, Z.-Y. Wang, X.-M. Chen, X.-Q. He and S.-L. Fan, "Photonic crystal narrow filters with negative refractive index structural defects", *Progress In Electromagnetics Research*, PIER 80, pp. 421-430, 2008.
- [6] R. Marques, F. Martin and M. Sorolla, *Metamaterials with Negative Parameters: Theory, Design, and Microwave Applications*, John Wiley & Sons, New York, 2007.
- [7] A. Grbic and G. V. Eleftheriades, "Experimental verification of backward-wave radiation from a negative refractive index metamaterial", *Journal of Applied Physics*, Vol. 92, No. 10, pp. 5930-5935, Nov. 2002.
- [8] F. Martín, J. Bonache, F. Falcone, M. Sorolla and R. Marqués, "Split ring resonator-based left-handed coplanar waveguide", *Applied Physics Letters*, Vol. 83, pp. 4652-4654, Dec. 2003.
- [9] M. Gil, J. Bonache, I. Gil, J. García-García and F. Martín, "Miniaturization of planar microwave circuits by using resonant-type left handed transmission lines", *IET Microwave, Antennas and Propagation*, Vol. 1, pp. 73-79, Feb. 2007.
- [10] D. Segovia-Vargas, F. J. Herraiz-Martinez, E. Ugarte-Munoz, L. E. Garcia-Munoz and V. Gonzalez-Posadas, "Quad-frequency lineally-polarized and dual-frequency circularly-polarized microstrip patch antennas with CRLH loading", *Progress In Electromagnetics Research*, Vol. 133, pp. 91-115, 2013.
- [11] S. H. Kim, J. H. Yoon, Y. Kim and Y. C. Yoon, "A modified Wilkinson divider using zero-degree phase shifting composite right/left-handed transmission line", *IEEE MTT-S International Microwave Symposium Digest*, pp. 1556-1559, 23-28 May, 2010.
- [12] O. Siddiqui, "Dispersion analysis of capacitive loaded negative-refractive-index transmission lines and associated applications," *Int. Symposium on Antennas, Propagation and EM Theory*, ISAPE, pp. 698-701, 2-5 Nov. 2008.
- [13] T. G. Kim and B. Lee, "Metamaterial-based wideband rat-race hybrid coupler using slow wave lines," *IET Microwaves, Antennas & Propagation*, Vol.4, No.6, pp. 717-721, June 2010.
- [14] H. Okabe, C. Caloz and T. Itoh, "A compact enhanced-bandwidth hybrid ring using an artificial lumped-element left-handed transmission-line section", *IEEE Transactions on Microwave Theory and Techniques*, Vol. 52, No. 3, pp. 798-804, March 2004.
- [15] D. Kholodnyak, P. Kapitanova, S. Humbla, R. Perrone, J. Mueller, M. A. Hein and I. Vendik, "180° Power Dividers Using Metamaterial Transmission Lines," *14th Conference on Microwave Techniques*, COMITE 2008, pp. 1-4, 23-24 April 2008.
- [16] A. F. Abdelaziz, T. M. Abuelfadl and O. L. Elsayed, "Realization of composite right/left-handed transmission line using coupled lines", *Progress In Electromagnetics Research*, PIER 92, pp. 299-315, 2009.
- [17] C. Caloz and T. Itoh "Application of the transmission line theory of left-handed (LH) materials to the realization of a microstrip LH transmission line", *Proc. IEEE-AP-S USNC/URSI National Radio Science Meeting*, Vol. 2, San Antonio, TX, pp. 412-415, June 2002.
- [18] G. V. Eleftheriades, A. K. Iyer and P. C. Kremer, "Planar negative refractive index media using periodically L-C loaded transmission lines," *IEEE Trans. Microwave Theory Tech.*, Vol. 50, No. 12, pp. 2702-2712, Dec. 2002.
- [19] A. Sanada, C. Caloz and T. Itoh, "Characteristics of the Composite Right Left-Handed Transmission Lines", *IEEE Microwave and Wireless Components Letter*, Vol. 14, No.2, 2004.
- [20] T. Cerri, G. Mongiardo and M. Rozzi, "Radiation from via-hole grounds in microstrip lines," *IEEE MTT-S Int. Microwave Symposium Digest*, pp. 341-344, 23-27 May 1994.
- [21] D. G. Swanson, "Grounding microstrip lines with via holes", *IEEE Transactions on Microwave Theory and Techniques*, Vol. 40, No. 8, pp. 1719-1721, 1992.
- [22] A. Grbic and G. V. Elefthcriades, "Experimnetal verification of backward-wave radiation from a negative refractive index material", *J. of Applied Physics*, Vol. 92, pp. 5930-5935, Nov. 2002.
- [23] H. H. Ta and A. V. Pham, "Compact Wilkinson Power Divider Based on Novel Via-less Composite Right/Left-handed (CRLH) Transmission Lines", *Third Int. Conference on Communications and Electronics (ICCE)*, pp. 313-317, Vietnam, 11-13 Aug. 2010.
- [24] H. M. Kim and B. Lee, "Analysis and synthesis of defected ground structures (DGS) using transmission line theory", *European Microwave Conference*, Vol. 1, pp. 4-6, 2005.
- [25] C. Caloz and T. Itoh, *Electromagnetic Metamaterials: Transmission line theory and microwave applications*, Wiley-IEEE Press, 2006.
- [26] G. Stojanovic, L. Zivanov and M. Damnjanovic, "Novel Efficient Methods for Inductance Calculation of Meander Inductor", *Int. J. for Computation Mathematics Elect. Electron. Eng.*, Vol. 25, No. 4, pp. 916-928, 2006.
- [27] W. R. Eisenstadt and Y. Eo, "S-parameter-based IC interconnect transmission line characterization," *IEEE Trans. Components, Hybrids and Manufacturing Technology*, Vol. 15, pp. 483-490, Aug. 1992.

- [28] H. Rahmanian, S. H. Sedighy and M. Khalaj-Amirhosseini, "Using a composite right/left handed transmission line to design a high compact Wilkinson power divider and rate race coupler", 6<sup>th</sup> International Symposium on Telecommunications (IST), pp. 84-87, Tehran, Iran, 2012.
- [29] M. Hayati and S. Roshani, "Miniaturized Wilkinson power divider with nth harmonic suppression using front coupled tapered CMRC", *Journal of Applied Computational Electromagnetics Society (ACES)*, Vol. 28, No. 3, pp. 221-227, 2013.
- [30] D. Hawatmeh, K. A. Shamaileh and N. Dib, "Design and analysis of multi-frequency unequal-split Wilkinson power divider using non-uniform transmission lines", *Journal of Applied Computational Electromagnetics Society (ACES)*, Vol. 27, No. 3, pp. 248-255, March 2012.



**Hossein Rahmanian** was born in Jahrom, Fars, Iran in 1989. He received B.Sc. in electrical engineering from Iran University of Science and Technology in 2012. He Studied Microwave and Photonic in Sharif University till 2014. His currnet researches and study interests consist of microwave active circuits,

RF system design, and frequency synthesisers.



**Seyed Hassan Sedighy** was born in Qaen, South Khorasan, Iran in 1983. He received B.Sc., M.Sc. and Ph.D. degrees in electrical engineering from Iran University of Science and Technology (IUST) in 2006, 2008 and 2013 respectively. From December 2011 to July 2012, he was with the University of California, Irvine as a Visiting Scholar. He is currently an assistant professor in school of new technologies of IUST.



**Mohammad Khalaj Amirhosseini** was born in Tehran, Iran in 1969. He received his B.Sc., M.Sc., and Ph.D. degrees from Iran University of Science and Technology (IUST) in 1992, 1994, and 1998, respectively, all in Electrical Engineering. He is currently a professor in College of Electrical Engineering of IUST. His scientific fields of interest are electromagnetic direct and inverse problems including Microwaves, Antennas, and Propagation. currently an assistant professor in school of new technologies of IUST.